


Deck Screws

Type-17

Bugle / Square Recess

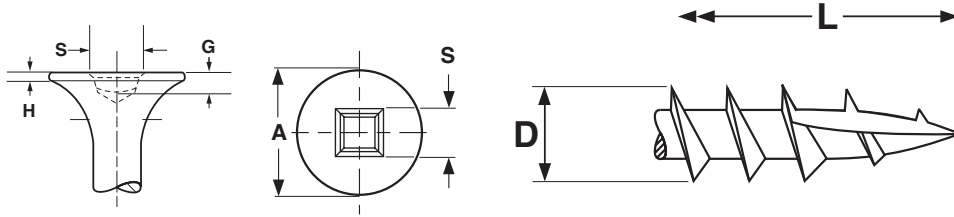

| BUGLE HEAD TYPE-17 DECK SCREWS | | | | | | | | | | | | |
|---|------------------|----------------|------|---------------|------|----------------|------|---------------------|------|-------|------|---------------------------|
| Nominal Size | Threads per Inch | D | | A | | H | | S | | G | | Square Recess Driver Size |
| | | Major Diameter | | Head Diameter | | Head Thickness | | Square Recess Drive | | | | |
| | | Max | Min | Max | Min | Max | Min | Recess Square | | Depth | | |
| | | | | | | | | Max | Min | Max | Min | |
| 6 | 8 to 10 | .158 | .142 | .347 | .315 | .031 | .020 | .106 | .090 | .071 | .055 | 1 |
| 8 | 8 to 10 | .187 | .170 | .363 | .315 | .039 | .020 | .113 | .110 | .075 | .064 | 2 |
| 10 | 8 | .211 | .192 | .363 | .334 | .039 | .020 | .113 | .110 | .075 | .064 | 2 |
| 12 | 8 | .239 | .212 | .435 | .390 | .055 | .042 | .135 | .131 | .115 | .105 | 3 |
| 1/4 | 8 | .270 | .240 | .472 | .450 | .058 | .047 | .135 | .131 | .115 | .105 | 3 |
| Tolerance on Length | | Up to 1" Incl. | | | | | | Over 1" | | | | |
| | | -0, +0.60 | | | | | | -0, +0.100 | | | | |
| In the absence of a single industry standard for Bugle Head Deck Screws, these dimensions are offered as a guide; slight deviations are acceptable. | | | | | | | | | | | | |

| | |
|---------------------------------|--|
| Description | A countersunk head screw with a flat top surface, a concave underhead bearing surface with spaced threads. The final 2 to 3 threads taper to an extra sharp point with a chip cavity cut out of approximately 25% of that tapered section. |
| Applications/ Advantages | Designed specifically for joining pieces of pressure treated lumber. Remains resistant to corrosion for approximately twice as long as do dacrotized steel deck screws. The chip cavity assists in the driving process |
| Material | 18-8 stainless steel |
| Hardness | Rockwell B 85 - 95 |
| Plating | Stainless deck screws require no additional coating. |